


HIGH POWER RELAY

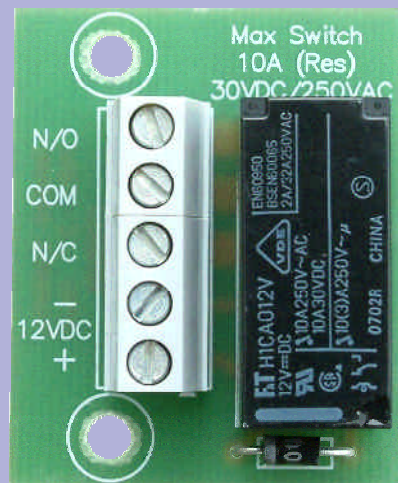

AUX-RL

A small relay for a large number of applications.

Neatrol Systems

www.neatrol.com.au

The AUX-RL is designed to deliver reliable service in all conditions while maximising flexibility and ease of use.

Features:

- 10 Amp current switching capability for up to 30VDC or 250VAC.
- High impedance relay coil requires only 44mA at 12V to trigger.
- Direct connection to any dry contact or open collector driver.
- Both normally open and normally closed contacts available.
- Electrical isolation from source to load.
- Built-in diode eliminates relay coil back-EMF.
- Dimensions 44 x 35 x 19 (mm)
- Wholly designed and manufactured in Australia.

Applications:

- Push button door lock interfacing.
- Electrical output isolation for low power control circuitry.
- Inversion of normally open or normally closed signals.
- Any application requiring flexible output connections.

Neatrol Systems

HEAD OFFICE

25B Harland Avenue

Malaga W.A. 6090

Phone (08) 9248 1646

Phone (Outside WA) 1300 55 5856

Fax (08) 9248 2003

E-Mail neatrol@neatrol.com.au

Proudly Supplied By: